

HOME SWEET HOME

Your home is your sanctuary. It's the place where you want to feel the most comfortable. Safe. Protected. But no matter how much you love your house, it seems the work is never completely done. And if purchasing a new roof is on your to-do list, it may seem like a daunting task-especially if your roof is already damaged or leaking. Since a roof plays such an important role in protecting you and your family from the elements, you realize that you can't let the damage get out of hand.

Don't worry, we know that a roof replacement project is a big, important decision. You can feel confident about choosing our roofing products-Owens Corning has been a recognized leader in the building industry for over 75 years. In fact, we're America's #1 roofing brand.** Not only can we help you choose the right shingle and roofing system components, we can also help you select the right contractor for the job. An Owens Corning® Roofing Preferred Contractor.

Together we can make this a positive experience—an opportunity, really. This is your chance to choose a roof that not only has outstanding performance, but also has exceptional beauty. So for years to come, you'll feel great every time you pull in the driveway.

Safe. Protected. Home.



The essentials for a roofing system.

It takes more than just shingles to create a high performance roof. Owens Corning® Roofing Essentials® Accessory Products work with our shingles to create a roofing system with excellent performance and protection.

- **a** Ventilation Products. Help protect a roof from premature failure by helping remove heat and moisture from the attic.
- **b** PINK® FIBERGLAS® Blown-In Insulation. Tiny air pockets trapped in the insulation resist the passage of heat flow.
- © Owens Corning® Hip & Ridge Shingles. Help protect the ridge vent and add an attractive, finished look to a roof's hips and ridges.
- **d** Owens Corning® Shingles. Add durable beauty to a home. Shingles are the first line of defense against the elements.
- Owens Corning® Underlayment Products. Add an extra layer of protection between the shingles and the roof deck to help prevent damage from wind-driven rain.
- **1** WeatherLock® Self-Sealing Ice & Water Barrier Products. Help guard vulnerable areas where water can do the most damage to a roof: eaves, valleys, dormers and skylights.
- Owens Corning® Starter Shingle Products. The first step in the proper installation of shingles.
- **1** Undereave Ventilation Products. Help prevent moisture buildup in the attic by working with ridge vents to keep air moving.





TruDefinition® DURATION® SHINGLES







Want to know more about Owens Corning® roofing products or find an Owens Corning® Roofing Preferred Contractor in your area? It's easy to reach us:

1-800-GET-PINK® | www.owenscorning.ca



OWENS CORNING ROOFING AND ASPHALT, LLC ONE OWENS CORNING PARKWAY TOLEDO, OHIO, USA 43659

1-800-GET-PINK®

Pub No. 10015467G Printed in Canada. January 2016. THE PINK PANTHER™ & © 1964 – 2016 Metro-Goldwyn-Mayer Studios Inc. All Rights Reserved. The colour PINK is a registered trademark of Owens Corning. © 2016 Owens Corning. All Rights Reserved.

Owens Corning® Roofing Preferred Contractors are independent contractors and are neither affiliates nor agents of Owens Corning Roofing and Asphalt, LLC, or its affiliated companies. (Canada)

TruDefinition® DURATION® SHINGLES with SureNail® Technology

Bold contrast. Deep dimension. TruDefinition.**Bold contrast. Deep dimension. TruDefinition.**

TruDefinition® Duration® Shingles are specially formulated to provide great contrast and dimension to any roof.

Through the use of multiple granule colours and shadowing, TruDefinition® Duration® Shingles offer a truly unique and dramatic effect. This exclusive combination of colour and depth is what makes TruDefinition® Duration® Shingles like no other.

TruDefinition® Duration® Shingles are available in popular colours with bold, lively contrast and complementing shadow lines for great dimension. They feature a Limited Lifetime Warranty,*/## 209 KM/H* / 130 MPH Wind Resistance Limited Warranty* and an Algae Resistance Limited Warranty.* Beyond the outstanding curb appeal and impressive warranty coverage, they also come with the advanced performance of SureNail® Technology.





The SureNail® Difference— A technological breakthrough in roofing. The innovative

features of Owens Corning® TruDefinition® Duration® Shingles with SureNail® Technology offer the following:


Breakthrough Design. Featuring a tough, woven engineered reinforcing fabric to deliver consistent fastening during installation.

Triple Layer Protection.™ A unique "triple layer" of reinforcement occurs when the fabric overlays the common bond of the shingle laminate layers that offers excellent fastener holding power.

Excellent Adhesion. Our enhanced Tru-Bond®† sealant grips tightly to the engineered fabric nailing strip on the shingle below.

Excellent Adhesive Power. Specially formulated, wide adhesive bands help keep shingle layers laminated together.

Exceptional Wind Resistance. The industry's first asphalt roofing shingle engineered to deliver 209 KM/H* / 130 MPH wind warranty performance with only 4 nails. 33% fewer nails are required for warranty protection¹, which can mean fewer deck penetrations.

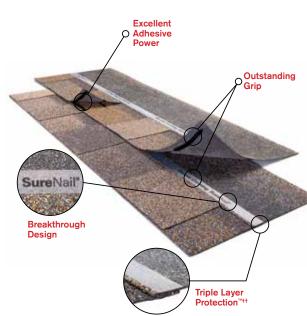




Brownwood[†]





Driftwood[†]

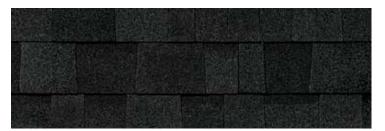

Onyx Black[†]



Quarry Gray[†]





Harbor Blue[†]





Estate Gray[†]



Chateau Green[†]



Product Attributes

Limited Lifetime**(As long as you own your home)	
Wind Resistance Limited Warranty*	WIND RESISTANCE 20
209 KM/H* / 130 MPH	
Algae Resistance Limited Warranty*	
10 Years	
Tru PROtection™ Non-Prorated Limited Warranty* Pe	eriod
10 Years	

TruDefinition® Duration® Shingles **Product Specifications**

Nominal Size	13¹/₄" x 39³/₅"
Exposure	55/8"
Shingles per Square	64
Bundles per Square	3
Coverage per Square	98.4 sq. ft.

Applicable Standards and Codes

CSA A123.5	
ASTM D228	;
ASTM D301	8, Type 1
ASTM D316	1, Class F Wind Resistance
ASTM D715	8, Class H Wind Resistance
ASTM D346	2
ASTM E108	/UL 790, Class A Fire Resistance
ICC-ES AC4	38*
UL ER2453	-01**